


F4: Climbing Space thru Communication Service Drops



The separation between supply vertical run (including its hardware) and other bolts, fastening devices, and/or communication drive hook, shall be at least 2" measured in any direction, including separation within the pole.

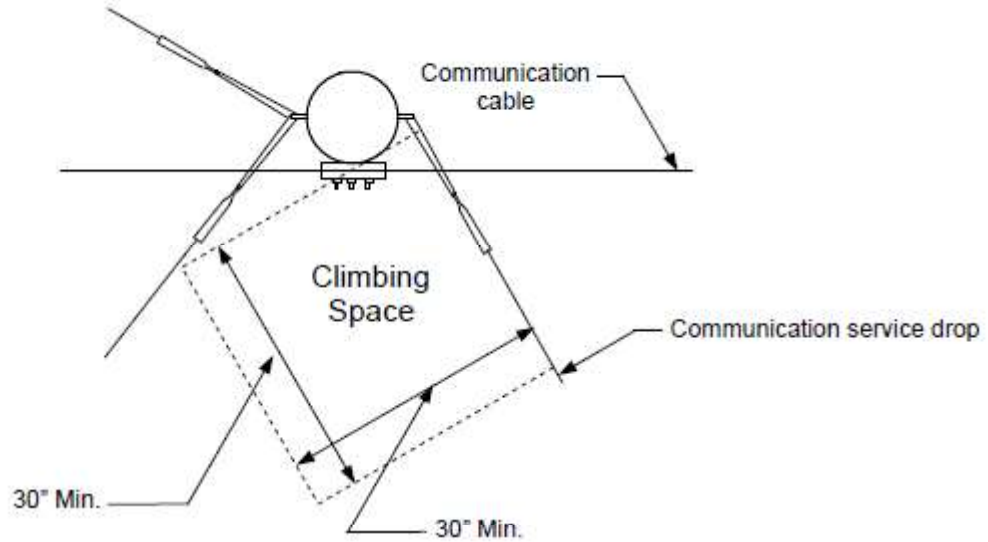